

TECHNICAL SPECIFICATION

Code:**WR-1A05M-S299BT1****OAK COTTAGE 3R FULL BODY MSKING MATT LACQUER BRUSHED**

Product description

Multilayer Parquet Elements for the indoor private or public usage as a floor.

PRODUCT DETAILS

Top layer

OAK

Middle layer

crosswise softwood strips

Bottom layer

softwood veneer

Pattern of surface

3-row strip

Connection

BALTIC LOC® 5G

Dimensions of ready product

length [mm]

2190 (+/- 2,0 mm)

width [mm]

182 (+/- 0,2 mm)

thickness [mm]

13,3 (+/- 0,2 mm)

top layer thickness [mm]

2,7 mm (+/- 0,2 mm)

Area per package

3,587 m²

Area per pallet

143,48 m²

Up to 0,5% of the material in delivery can be shorter for 30 mm

Hardness

Hard wood

Floor heating installation

YES

PRODUCT CHARACTERISTIC

Lipping (between elements) [mm]

≤ 0,2

Deviation of rectangularity (on the item width) [mm]

≤ 0,36

Crosswise warping (across the item)[mm]

≤ 0,36

Spring (along the element) [mm]

≤ 2,19

Moisture content [%]

7 +/- 2

FINISHING SURFACE

Gloss

9 - 12 GU

Slipperiness

USRV 46

Adhesion to wood

SC3

Grindability

min 100 rev. (Taber method, S-42)

PHYSICAL AND CHEMICAL PROPERTIES

Reaction to fire

Dfl – s1

Emission of formaldehyde

E1

Content of pentachlorophenol

NPD

Thermal conductivity

0,11 W/mK

Biological durability

class 1

PRODUCT MARKING

CE

TECHNICAL SPECIFICATION

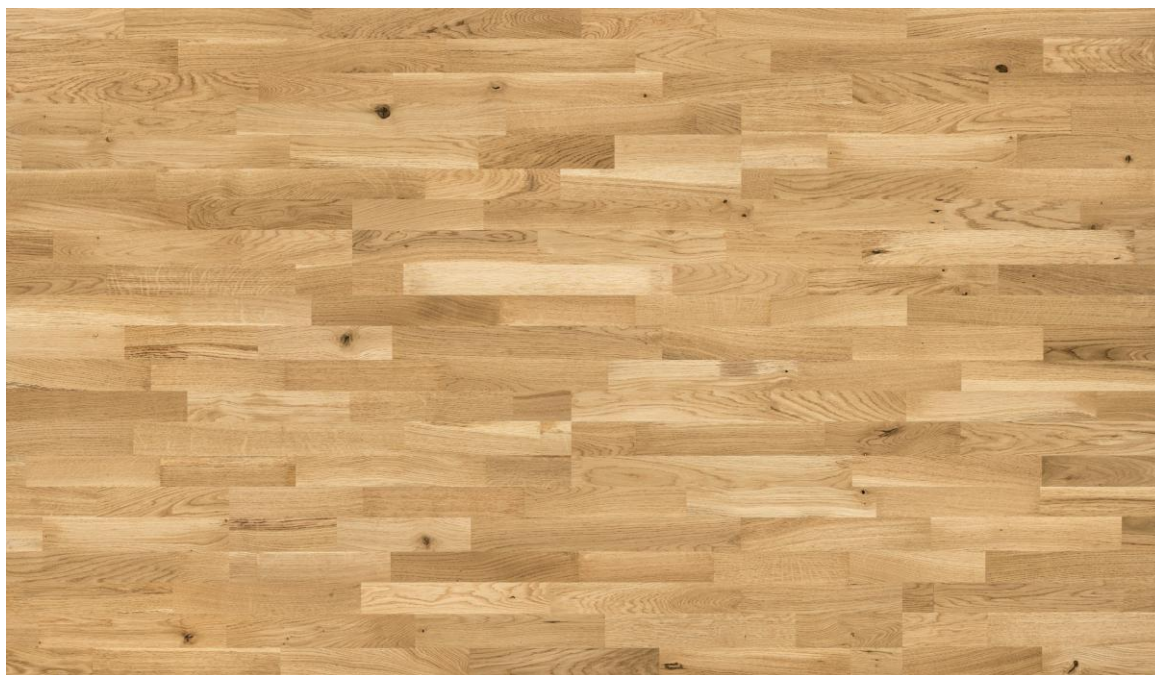


Photo shows a grade specification, and does not reflect the true colour of the floor.

